


**ZAPORNI ZASUN – MEKO BRTVLJENJE – RAVNO KUČIŠTE – F4 – SE VRETENO BEZ PODIZANJA
DN40–DN500**

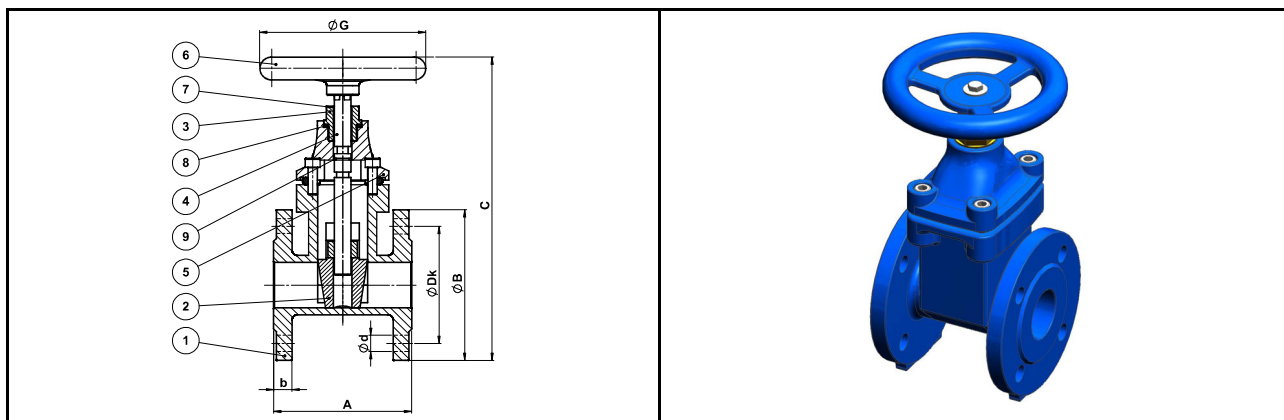

Materijali

| | | |
|---|----------------|--|
| 1 | Kučište | Nodularni lijev – GGG50 |
| 2 | Klin | Nodularni lijev – GGG50 s NBR premazom |
| 3 | Matica vretena | Mesing |
| 4 | Vreteno | Nehrđajući čelik – A304 |
| 5 | Poklopac | Nodularni lijev – GGG50 |
| 6 | Ručni pogon | Nodularni lijev – GGG50 |
| 7 | Brtva vretena | NBR |
| 8 | Brtva | PTFE |
| 9 | O-Ring | NBR |

PN10

| Kat. Broj | DN | A | ØB | ØDk | C | ØG | b | n-Ød | Težina (kg) |
|-----------|-----|-----|-----|-----|--------|-----|----|-------|-------------|
| A030782 | 40 | 140 | 150 | 110 | 315 | 160 | 18 | 4–18 | 11,0 |
| A012221 | 50 | 150 | 165 | 125 | 322 | 180 | 20 | 4–18 | 13,0 |
| A018900 | 65 | 170 | 185 | 145 | 367 | 180 | 20 | 4–18 | 16,0 |
| A012222 | 80 | 180 | 200 | 160 | 400 | 200 | 20 | 8–18 | 19,0 |
| A011867 | 80* | 180 | 200 | 160 | 400 | 200 | 20 | 4–18 | 19,0 |
| A012223 | 100 | 190 | 220 | 180 | 440 | 250 | 22 | 8–18 | 28,0 |
| A018901 | 125 | 200 | 250 | 210 | 585 | 280 | 22 | 8–18 | 44,0 |
| A012224 | 150 | 210 | 285 | 240 | 602 | 280 | 22 | 8–23 | 46,0 |
| A034755 | 200 | 230 | 340 | 295 | 690 | 340 | 24 | 8–23 | 80,0 |
| A043875 | 250 | 250 | 405 | 350 | 822 | 400 | 26 | 12–22 | 107,0 |
| A043876 | 300 | 270 | 460 | 400 | 935 | 400 | 26 | 12–22 | 155,0 |
| A045449 | 350 | 290 | 520 | 460 | 1090 | 450 | 30 | 16–23 | 230,0 |
| A045450 | 400 | 310 | 580 | 515 | 1180 | 450 | 30 | 16–28 | 260,0 |
| A045451 | 500 | 350 | 715 | 620 | 1407,5 | 600 | 30 | 20–28 | 470,0 |

PN16

| Kat. Broj | DN | A | ØB | ØDk | C | ØG | b | n-Ød | Težina (kg) |
|-----------|-----|-----|-----|-----|--------|-----|----|-------|-------------|
| A030782 | 40 | 140 | 150 | 110 | 315 | 160 | 18 | 4–18 | 11,0 |
| A012221 | 50 | 150 | 165 | 125 | 322 | 180 | 20 | 4–18 | 13,0 |
| A018900 | 65 | 170 | 185 | 145 | 367 | 180 | 20 | 4–18 | 16,0 |
| A012222 | 80 | 180 | 200 | 160 | 400 | 200 | 20 | 8–18 | 19,0 |
| A011867 | 80* | 180 | 200 | 160 | 400 | 200 | 20 | 4–18 | 19,0 |
| A012223 | 100 | 190 | 220 | 180 | 440 | 250 | 22 | 8–18 | 28,0 |
| A018901 | 125 | 200 | 250 | 210 | 585 | 280 | 22 | 8–18 | 44,0 |
| A012224 | 150 | 210 | 285 | 240 | 602 | 280 | 22 | 8–23 | 46,0 |
| A018902 | 200 | 230 | 340 | 295 | 690 | 340 | 24 | 12–23 | 80,0 |
| A018903 | 250 | 250 | 405 | 355 | 822 | 400 | 26 | 12–27 | 107,0 |
| A029124 | 300 | 270 | 460 | 410 | 935 | 400 | 28 | 12–27 | 155,0 |
| A032392 | 350 | 290 | 520 | 470 | 1350 | 450 | 28 | 16–27 | 230,0 |
| A045452 | 400 | 310 | 580 | 525 | 1180 | 450 | 30 | 16–31 | 260,0 |
| A045453 | 500 | 350 | 715 | 650 | 1407,5 | 600 | 30 | 20–34 | 470,0 |

Napomena

Ugradbena dužina odgovara standardu DIN3202 F4.

Kataloški brojevi od DN40–DN150 su isti za PN10 i PN16 i uvijek su navedeni kao PN16.

*Na izbor i sa prirubnicom od 4 rupe.