

EKSPANZIJSKE POSUDE


cal pro



- ekspanzijske posude za sanitarnu vodu izrađene po direktivi PEDM97/23/CE
- butyl membrana, primjerena za pitku vodu, DIN 4807-3
- najveća radna temperatura: +110 C
- Boja: do 50 L - bijela, od 80 L do 200 L - crvena
- 35L i 50 L s nogicama

BR. ARTIKLA	VOLUMEN	PROMJER (mm)	VISINA (mm)	MAX. TLAK	TEMP SISTEMA	PRIKLUČAK
1300000400	4	225	195	5 bara	-10+99C	3/4" G
1300000800	8	220	295	5 bara	-10+99C	3/4" G
1300001200	12	294	281	4 bara	-10+99C	3/4" G
1300001800	18	290	400	4 bara	-10+99C	3/4" G
1300002400	24	324	415	4 bara	-10+99C	3/4" G
1300003500	35	404	408	4 bara	-10+99C	3/4" G
1300005000	50	407	530	4 bara	-10+99C	3/4" G
1300008000	80	450	608	6 bara	-10+99C	3/4" G
1300010500	105	500	665	6 bara	-10+99C	3/4" G
1300015000	150	500	897	6 bara	-10+99C	3/4" G
1300020000	200	600	812	6 bara	-10+99C	3/4" G
1300025000	250	630	957	6 bara	-10+99C	3/4" G
1300030000	300	630	1105	6 bara	-10+99C	3/4" G
1300040000	400	630	1450	6 bara	-10+99C	3/4" G
1300050000	500	750	1340	6 bara	-10+99C	1" G
1300060000	600	750	1555	6 bara	-10+99C	1" G
1300070000	700	750	1755	6 bara	-10+99C	1" G
1300080000	800	750	2145	6 bara	-10+99C	1 1/2" G

Montažna shema

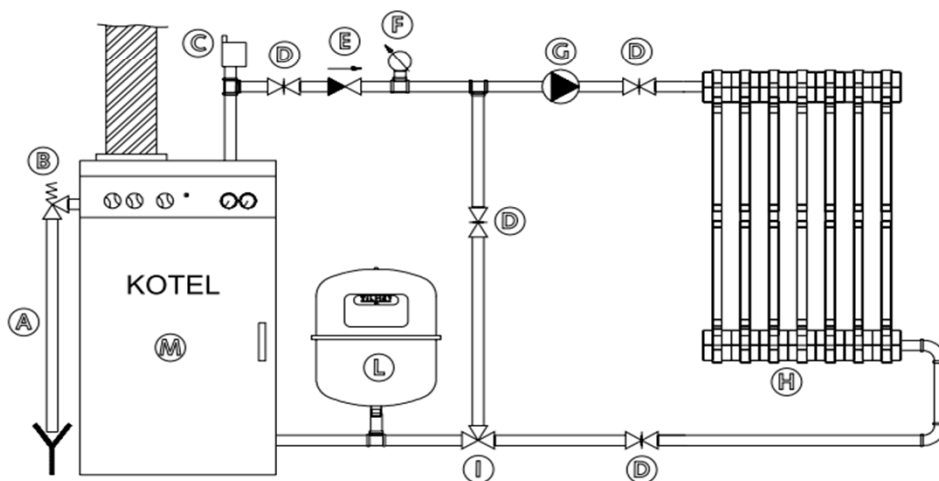

SIGURNOSNI PRELJEV
 SIGURNOSNI VENTIL
 ODZRAČNIK
 NEPOVRATNI VENTIL
 ZAPORNI VENTIL
 MANOMETAR
 PUMPA
 GRIJAĆI ELEMENT
 VENTIL ZA MJESANJE

ZILMET EKSPANZIJSKA
 POSUDA
 KOTAO